




Cableways

Technical specification

J2582

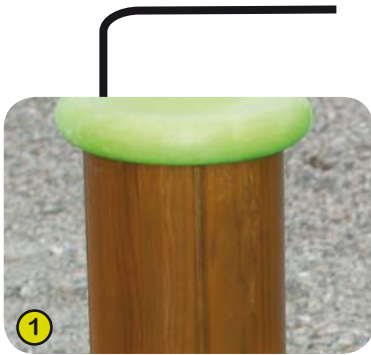

- 1- **The 125mm round posts** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi, insects and termites.

The caps are made of injection moulded polyamide.




- 2- **The one-piece rail** is made of stainless steel, Ø 76.1mm, 3.6mm thick.

The trolley is made of stainless steel ensuring its durability.



- 3- **The grip section of the stainless steel handle** is overmoulded with rubber to give a good grip.

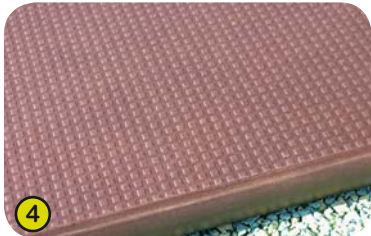

- 4- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL).

Further reinforcement is provided by galvanised steel supports, located on the underside of the platforms.



- 5- **Injection moulded polyamide fixings** connect the posts with the platforms.



- 6- **The fixings** are made of stainless steel and are protected by polyamide anti-vandal caps.