




The Sand Factory

Technical specification

Wooden posts

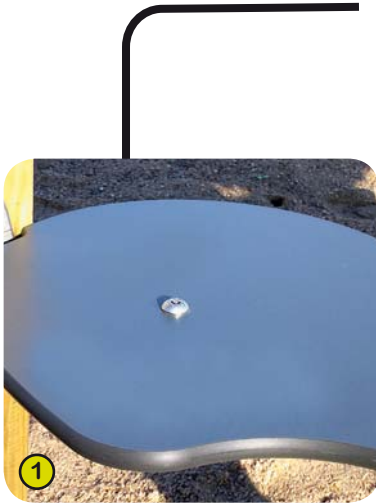

1- **The tables** are made with a compact material 13mm thick. It is made up of 70% of softwood fibres and 30% of thermosetting resin, and it stands up to weathering very well (sun, rain, damp, etc.) and sand abrasion. The coloured surfaces are treated with products based on coloured acrylic polyurethane resins; this enables them to stand up well to UV radiation and resist damage.



2- **The vertical 95mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi, insects and termites.



3- **The tubes** are made of stainless steel, diameter 40mm, guaranteeing lasting durability and reliability of the equipment.

Injection moulded polyamide fixings connect the posts with the platforms and the various play features. They are non-toxic, flame shock and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.

4- **The buckets** are made of moulded polyethylene.

5- **The «green pieces»** are made of injected polyamide to combine rigidity with sturdiness.



6- **The fixings** are made of stainless or plated steel and protected by anti-vandal polyamide caps.

