




Cableways

Technical specification


J512

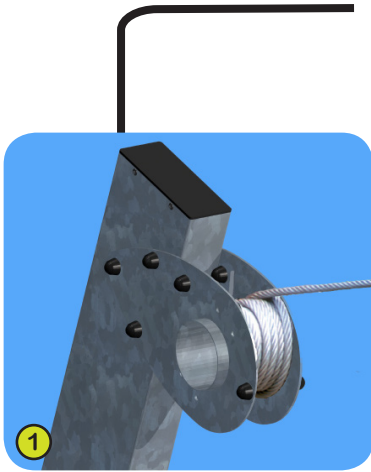

- 1- **The cableway beams**, 250x100x4mm, are made of galvanised steel with the ends covered with a polyethylene cap. The correct tension of the 10mm diameter galvanized steel cable is easily maintained via a ratchet system.



- 2- **The cableway seat** is made of shock absorbing honeycomb rubber. The supporting chain is made from galvanised steel and covered with a protective plastic coating.

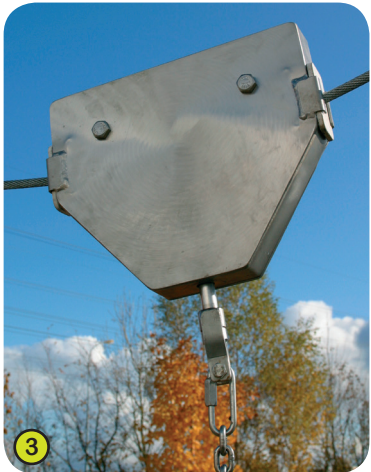

- 3- **The trolley** is made of stainless steel ensuring its durability. The trolley wheels are made of polyamide reducing noise levels during usage. The braking mechanism of the pulley ensures that it rests in a stationary position when no force is applied.



- 4- **The tubes** are made of galvanised steel, Ø 60mm.

- 5- **The 19mm thick platform** is made from a textured, non-slip compact material (HPL).

- 6- **The fixings** are made of stainless steel and are protected by polyamide anti-vandal caps.

